



LEVEL SWITCH

Main Part Materials



Cable:P.V.C \varnothing 6x2 cores \varnothing 7x3 cores
 Rope:SUS 304 NYLON P.V.C Cable
 Fixed weight:PE. SUS 304 SUS316
 Clip:NYLON
 Float:PE. SUS 316L PP
 Flange:P.V.C P.P SUS 304 SUS 316
 Terminal box:P.P. P.V.C SUS 304

Electrical Rating

AC 220V 2A AC 220V 7A (Micro Switch)

Maximum Service Temperature

PE. 0°C - 60°C SUS316 0°C - 80°C

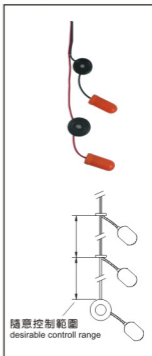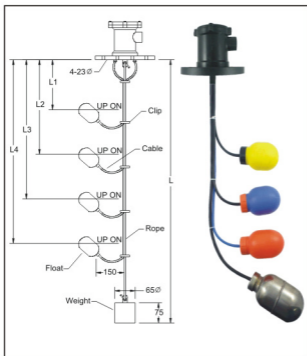

歡迎訂製各式液位開關，敬請惠予告知下列之條件：

- | | | | |
|--|--------------------------|--------------------------|----------------------|
| 1. 型式 (Model) | 2. 液體名稱 (Name of liquid) | 3. 比重 (Specific gravity) | 4. 壓力 (Pressure) |
| 5. 黏度 (Viscosity) | 6. 使用材質 (Material) | 7. 接頭動作 (Contact Action) | 8. 接續方式 (Connection) |
| 9. 接點 間隔 L, L1, L2, L3, L4... (Contact Size: L, L1, L2, L3, L4...) | | | |

SYNTEX TECH CORP.

NO.503, SEC.2, JINLING RD., PINGJHEN CITY, TAOYUAN COUNTY 324, TAIWAN, (R.O.C)

TEL: 886-3-4679659 FAX: 886-3-4679649

www.syntextech.com.tw syntex.tech@msa.hinet.net